


SPECIFICATIONS

*with rubber shoe type

Machine weight	Rubber crawler	kg	980	
Bucket capacity, std. SAE/CECE		m ³	0.022/0.018	
Bucket width	with side teeth	mm	368	
	without side teeth	mm	350	
Engine	Model		D722-BH-5	
	Type		Water-cooled, diesel engine E-TVCS (Economical, ecological type)	
	Output ISO90249	PS/rpm		10.2/2050
		kW/rpm		7.4/2050
	Number of cylinders			3
	Bore × stroke	mm		67 × 68
Displacement	cc		719	
Overall length	mm		2750	
Overall height	mm		2230	
Swivelling speed	rpm		8.3	
Rubber shoe width	mm		180	
Tumbler distance	mm		900	
Dozer size (width × height)	mm		700/860 × 200	
Hydraulic pumps	P1, P2		Gear pump	
	Flow rate	ℓ/min	10.5 + 10.5	
	Hydraulic pressure	MPa (kgf/cm ²)	16.7 (170)	
Max. digging force	Arm	kN (kgf)	4.5 (460)	
	Bucket	kN (kgf)	9.8 (1000)	
Boom swing angle (left/right)	deg		55/60	
Auxiliary circuit	Flow rate	ℓ/min	21.0	
	Hydraulic pressure	MPa (kgf/cm ²)	170	
Hydraulic reservoir	ℓ		12.5	
Fuel tank capacity	ℓ		12.0	
Max. travelling speed	km/h		2.0	
Ground contact pressure	kPa (kgf/cm ²)		24.3 (0.25)	
Ground clearance	mm		150	

WORKING RANGE

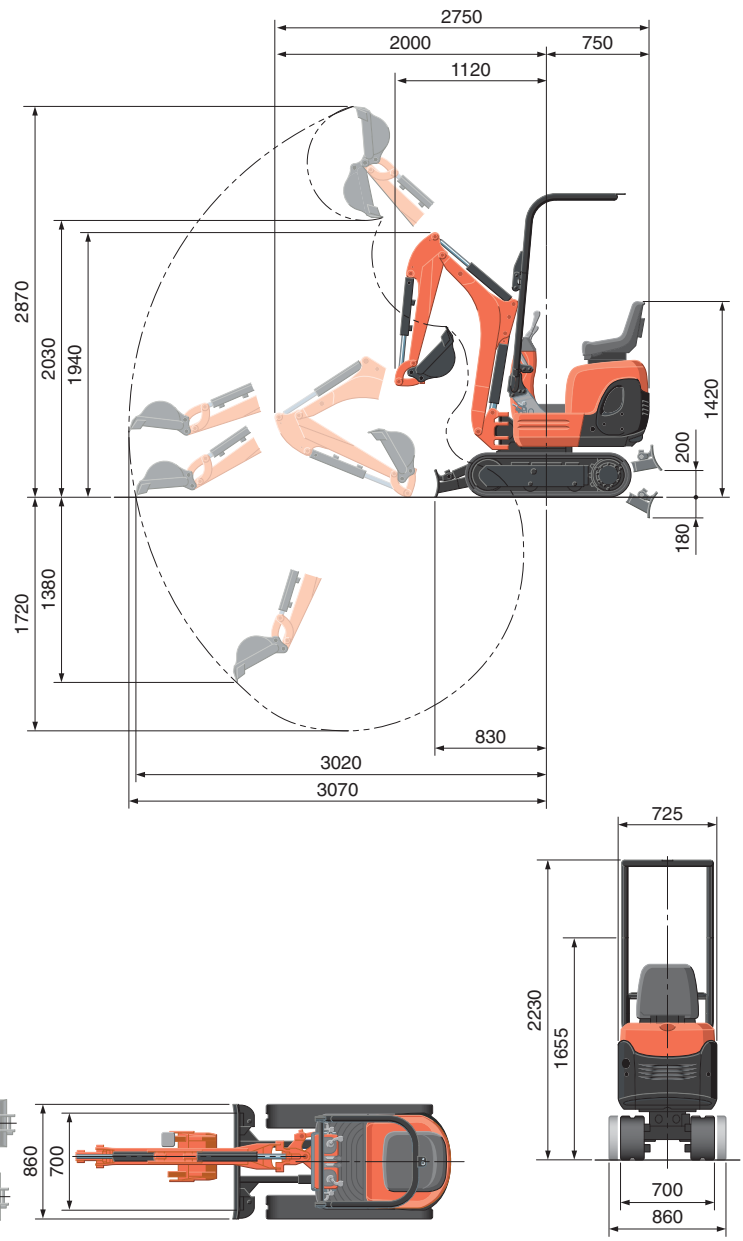

Unit: mm


LIFTING CAPACITY

Lift Point Height	kN (ton)								
	Lifting point radius (1 m)			Lifting point radius (2 m)			Lifting point radius (2.5 m)		
	Over-front		Over-side	Over-front		Over-side	Over-front		Over-side
Blade Down	Blade Up	Blade Down		Blade Up	Blade Down		Blade Up		
2.0 m	-	-	-	1.9 (0.20)	1.5 (0.15)	1.2 (0.13)	-	-	-
1.0 m	-	-	-	2.0 (0.21)	1.5 (0.15)	1.2 (0.12)	1.7 (0.17)	1.0 (0.10)	0.8 (0.09)
0 m	6.0 (0.61)	3.8 (0.39)	2.9 (0.29)	2.2 (0.23)	1.3 (0.14)	1.1 (0.11)	1.5 (0.16)	1.0 (0.10)	0.8 (0.08)
-1.0 m	3.6 (0.37)	3.6 (0.37)	2.9 (0.30)	1.3 (0.13)	1.3 (0.13)	1.0 (0.11)	-	-	-

Please note:

* The lifting capacities are based on ISO 10567 and do not exceed 75% of the static tilt load of the machine or 87% of the hydraulic lifting capacity of the machine.

* The excavator bucket, hook, sling and other lifting accessories are not included on this table.

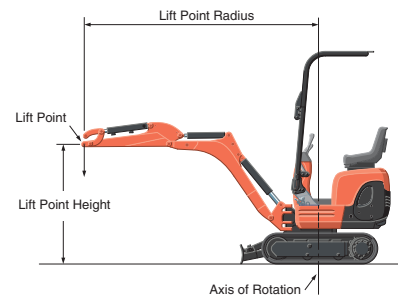

* Working ranges are with Kubota standard bucket, without quick coupler.

* Specifications are subject to change without notice for purpose of improvement.

KUBOTA EUROPE S.A.S.

19 à 25, Rue Jules Verceyrysse -
Zone Industrielle - B.P. 50088
95101 Argenteuil Cedex France
Téléphone : (33) 01 34 26 34 34
Télécopieur : (33) 01 34 26 34 99

<http://www.kubota-global.net>

W21PS00892